



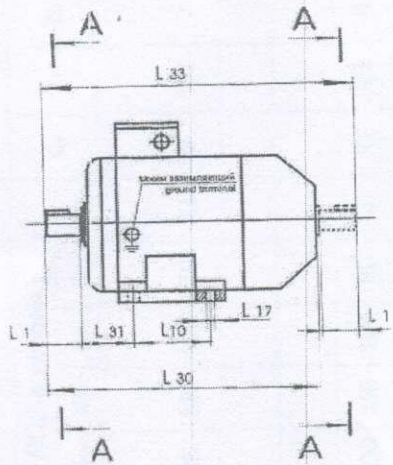








УСТАНОВОЧНО-ПРИСОЕДИНИТЕЛЬНЫЕ РАЗМЕРЫ



Исполнение IM 1081, IM 1082

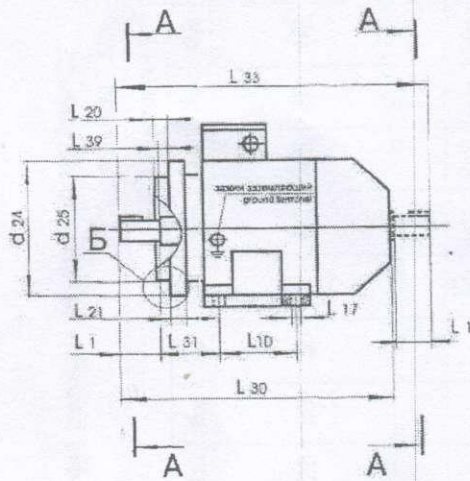

Исполнение IM 2081, IM 2082, IM 2181, IM 2182

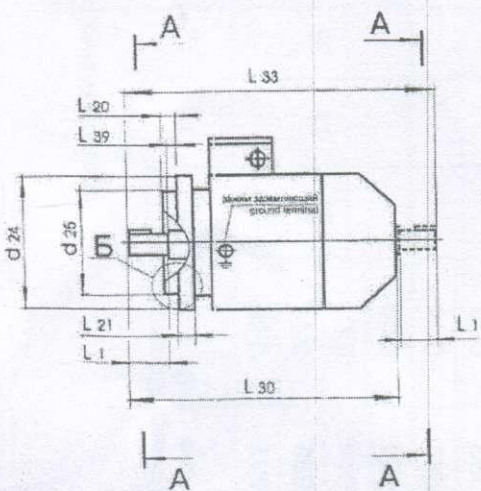


Исполнение IM 3081, IM 3082, IM 3681, IM 3682

Установочные и присоединительные размеры двигателей MEA56-132

Типоразмер двигателя	Мощность, кВт	Лапы			Фланец																	Конец вала					
		b ₁₀	l ₁₀	l ₃₁	FF					FT(1-е исполн.)					FT(2-е исполн.)					d ₁	l ₁	b ₁	h ₁	h ₅			
					FF	d ₂₀	d ₂₂	d ₂₄	d ₂₅	l ₂₀	FT	d ₂₀	d ₂₂	d ₂₄	d ₂₅	l ₂₀	FT	d ₂₀	d ₂₂						d ₂₄	d ₂₅	l ₂₀
MEA56A2	0,09	90	71	36	FF100	100	7	120	80	3	FT65	65	M5	80	50	2,5	FT85	85	M6	105	70	2,5	9	20	3	3	10,2
MEA56B2	0,12																										
MEA56A4	0,06																										
MEA56B4	0,09																										
MEA63A2	0,18	100	80	40	FF115	115	10	140	95	3	FT75	75	M5	90	60	2,5	FT100	100	M6	120	80	3	11	23	4	4	12,5
MEA63B2	0,25																										
MEA63A4	0,12																										
MEA63B4	0,18																										
MEA71A2	0,37	112	90	45	FF130	130	10	160	110	3,5	FT85	85	M6	105	70	2,5	FT115	115	M8	140	95	3	14	30	5	5	16
MEA71B2	0,55																										
MEA71A4	0,25																										
MEA71B4	0,37																										
MEA71A6	0,18																										
MEA71B6	0,25																										
MEA71A8	0,09																										
MEA71B8	0,12																										
MEA80A2	0,75	125	100	50	FF165	165	12	200	130	3,5	FT100	100	M6	120	80	3	FT130	130	M8	160	110	3,5	19	40	6	6	21,5
MEA80B2	1,1																										
MEA80A4	0,55																										
MEA80B4	0,75																										
MEA80A6	0,37																										
MEA80B6	0,55																										
MEA80A8	0,18																										
MEA80B8	0,25																										

Типоразмер двигателя	Мощность, кВт	Лапы			Фланец															Конец вала							
		b ₁₀	l ₁₀	l ₃₁	FF					FT(1-е исполн.)					FT(2-е исполн.)					d ₁	l ₁	b ₁	h ₁	h ₅			
					FF	d ₂₀	d ₂₂	d ₂₄	d ₂₅	l ₂₀	FT	d ₂₀	d ₂₂	d ₂₄	d ₂₅	l ₂₀	FT	d ₂₀	d ₂₂						d ₂₄	d ₂₅	l ₂₀
MEA90S2	1,5	140	100	56	FF165	165	12	200	130	3,5	FT115	115	M8	140	95	3	FT130	130	M8	160	110	3,5	24	50	8	7	27
MEA90L2	2,2		125																								
MEA90S4	1,1		100																								
MEA90L4	1,5		125																								
MEA90S6	0,75		100																								
MEA90L6	1,1		125																								
MEA90S8	0,37		100																								
MEA90L8	0,55		125																								
MEA100L2	3	160	140	63	FF215	215	15	250	180	4	FT130	130	M8	160	110	3,5	FT165	165	M10	200	130	3,5	28	60	8	7	31
MEA100LA4	2,2																										
MEA100LB4	3																										
MEA100L6	1,5																										
MEA100LA8	0,75																										
MEA100LB8	1,1																										
MEA112M2	4	190	140	70	FF215	215	15	250	180	4	FT130	130	M8	160	110	3,5	FT165	165	M10	200	130	3,5	28	60	8	7	31
MEA112M4	4																										
MEA112M6	2,2																										
MEA112M8	1,5																										

Типоразмер двигателя	Мощность, кВт	Лапы			Фланец															Конец вала																	
		b ₁₀	l ₁₀	l ₃₁	ГГ					FT(1-е исполн.)					FT(2-е исполн.)					d ₁	l ₁	b ₁	h ₁	h ₅													
					FF	d ₂₀	d ₂₂	d ₂₄	d ₂₅	l ₂₀	FT	d ₂₀	d ₂₂	d ₂₄	d ₂₅	l ₂₀	FT	d ₂₀	d ₂₂						d ₂₄	d ₂₅	l ₂₀										
MEA132SA2	5,5																																				
MEA132SB2	7,5		140																																		
MEA132S4	5,5																																				
MEA132M4	7,5		178																																		
MEA132S6	3	216	140	89	FF265	265	15	300	230	4	FT165	165	M10	200	130	3,5	-	-	-	-	-	-	38	80	10 (12)	8	41										
MEA132MA6	4		178																																		
MEA132MB6	5,5																																				
MEA132S8	2,2		140																																		
MEA132M8	3		178																																		


 /Бондарев И.А./
 15.10.12